

Line Impedance Stabilization Networks / Artificial Mains Network for CISPR25 / ISO7637, Single line, 25A to 400A



LISN (Artificial Mains Network) is a low-pass filter typically placed between an AC or DC power source and the EUT (Equipment Under Test) to create a known impedance as per complying standard for the measurement of conducted emission. It also isolates the unwanted RF signals from the power source with pre-filter included. It provides a Radio frequency (RF) noise measurement port.

In addition LISN is used to predict conducted emission for diagnostic, pre-compliance and compliance testing.

Scientific designs and manufactures models in compliance with CISPR 16-1-2/25, EN, ANSI C63.4, FCC, ETS, VCCI and VDE, MIL461E/F standards and automotive for measurements in commonly used Standards.

These single line LISNs are used in automotive industries and test labs for measurement of interface voltages in vehicles. EVs, Ships, Aircrafts etc. The characteristic impedance is designed as per CISPR of these LISNs is $(5\mu\text{H} + 1\Omega) \parallel 50\Omega$

These LISN also can be used in immunity test by bulk current injection and transients as per ISO7637-2 standards.



A Transient limiter is highly recommended to use with LISN at the front end of EMI Rx or Spectrum Analyzer to protect measuring instrument from transients.

Technical Specifications

Model	LIN25-1A	LIN100-1A	LIN200-1A	LIN400-1A
Frequency Range	100 kHz – 150 MHz			
Maximum Load Current				
Continuous Current	25 A	100 A	200 A	400 A
Peak Current (15 min)	50 A	120 A	225 A	425 A
Maximum Input Voltage				
DC	600 V			
AC	300 V @ 50/60 Hz 130 V @ 400 Hz, 250 V @ 400 Hz (Optional)			
AMN Impedance	$(5 \mu\text{H} + 1 \Omega) \parallel 50 \Omega \pm 10\%$			
DC Resistance mains to EUT	< 5 m Ω			
Impedance @ 50Hz	< 5 m Ω			
Impedance @ 400Hz	< 15 m Ω			
Standard Reference	CISPR16-1-2/25, MIL461E/F, ISO 7637-2 Transients, BCI, DO-160			
RF Output Connector	BNC (F) 50 Ω Optional : N Type (F)	N Type (F) Connector		
Mains Input & Output Terminals (EUT)	Wing Terminal, Optional : Supercon			
All LISNs are provided with manufacturer's calibration data.				

Available Options :

- Transient Limiter
- Calibration Certificate traceable to ISO/IEC 17025 standard

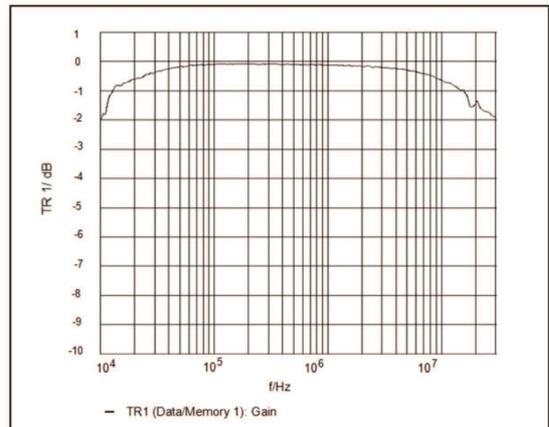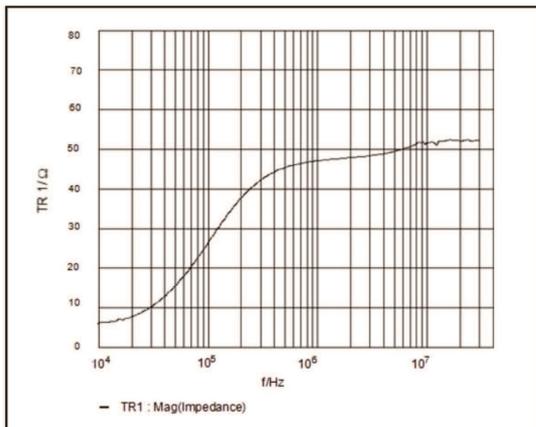

Subject to Change

 昆山盈轩电子科技有限公司
Kunshan Yingxuan Electronic Technology Co., LTD

地址：江苏省昆山市玉山镇新南中路567号1号楼A栋1919室
Address: Room 1919, Building 1-A, No. 567 New Nan Zhong Road, Yushan Town, KunShan City

 0512-57350498  0512-57350478  sales@ksyet.com  www.ksyet.com

